

# The Aglass VT150A Sewage Pump Station


UNIT COMES FULLY ASSEMBLED

**LID OPTIONS:**

600 MM SQUARE  
ALL LIDS ARE  
GAS-TIGHT

CLASS B –  
MEDIUM DUTY  
CLASS D –  
HEAVY DUTY  
FIBREGLASS  
LIDS FOR  
ABOVE  
BRASS EDGE  
FOR TILING

WORKING CAPACITY  
200L  
MAXIMUM CAPACITY  
220L

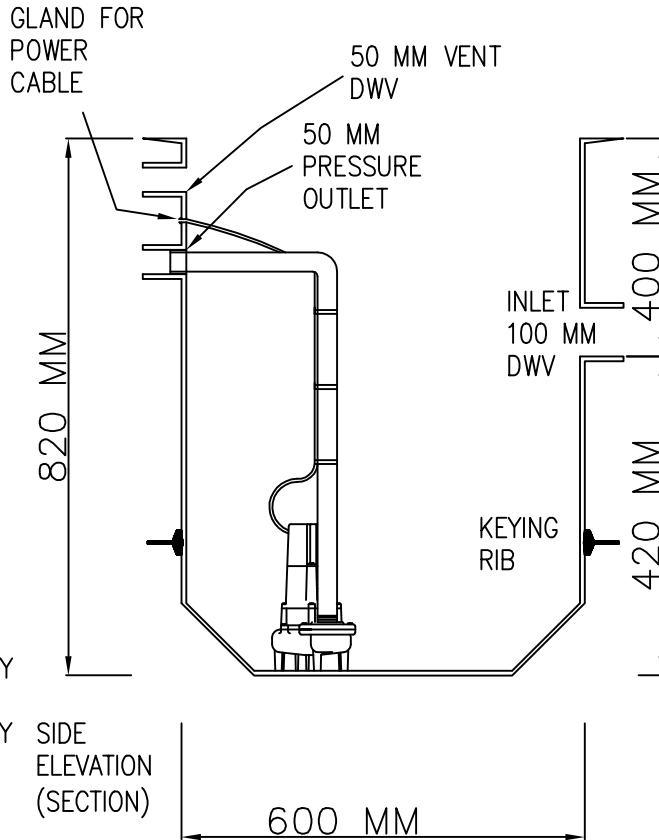

**STANDARD FEATURES:**

- 50 MM BRASS SWING CHECK VALVE
- 50 MM PRESSURE UNION
- SUBMERSIBLE SEWAGE CUTTER PUMP (240/415 VOLTS)
- INLET, OUTLET AND VENT
- ISOLATION TAP

**OPTIONAL EXTRAS:**

- HIGH LEVEL ALARM
- PIT RISERS


TANK IS DESIGNED FOR ABOVE AND BELOW GROUND INSTALLATION

**AUSTRALIAN STANDARDS:**

AS1170-P1  
AS2634  
AS1546

**APPLICATIONS:**

- GRANNY FLATS
- BOAT SHEDS
- BUILDING SITES ETC

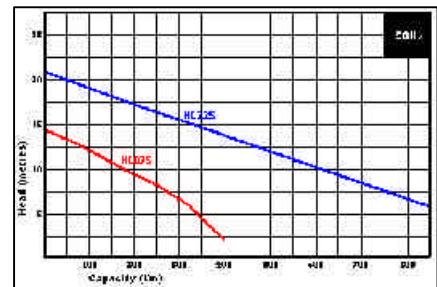

SEWAGE PUMP  
PERFORMANCE CURVES  
HYFLOW SERIES PUMPS

**OTHER PUMP STATIONS ALSO AVAILABLE**

THIS DOCUMENT IS CONFIDENTIAL. THE COPYRIGHT THEREIN IS VESTED IN AGLASS SALES PTY LTD TAREN POINT, NSW, AUSTRALIA. RECIPIENTS MUST OBTAIN THE WRITTEN AUTHORITY OF THE SAID COMPANY BEFORE WHOLLY OR PARTLY DUPLICATING THE CONTENTS OR DISCLOSING SAME TO OTHERS. ALL RIGHTS RESERVED.

	SIGNATURE	DATE
DRAWN	M.P.	28.02.04
CHECKED	K.A.	28.02.04
APPR'D	K.A.	28.02.04
DRAWING NUMBER: AGL-VT500-A		
SCALE:	NTS	SHEET SIZE A4



**AGLASS SALES PTY LTD**

PH (02) 9526 2822  
FAX (02) 9525 5085