

GREASE ARRESTORS INSTALLATION INSTRUCTIONS

MAINTENANCE

An Aglass Grease Arrestor removes cooking oils, grease and food solids from wastewater. To ensure every grease arrestor's effectiveness, contents must be cleaned out completely at a minimum of every 3 months, or when a floating layer of fat or oil 75 mm thick has formed on the surface, whichever occurs sooner.

Don't use solvents, enzymes or mutant bacteria to get rid of greasy kitchen wastes in your grease arrestor, as they are illegal unless approved by Trade Waste.

All Grease Arrestors must be emptied by a licensed Waste Removal Contractor; a list of contractors can be obtained from your local Water Authority.

INSTALLATION

Grease Arrestors can be installed either above or below ground. If gravity fall is not obtainable on a below ground unit, risers are available. Pump Stations are also available.

All equipment must be installed in accordance with the relevant Codes of Practice and Regulations and Wastewater requirements.



ABOVE GROUND MODEL DEPICTED


GREASE ARRESTOR WITH CLASS "B" - MEDIUM DUTY LID INSTALLATION


Once pipe work levels are obtained the tank can be lowered into place and connected. The tank MUST be filling with water while backfilling – equal amounts of water to backfill. Backfill can be sand or gravel and must fill up to the top keying rib. From the top keying rib to ground level must be concreted.

GREASE ARRESTOR WITH CLASS "D" - HEAVY DUTY LID INSTALLATION

Once pipe work levels are obtained the tank can be lowered into place and connected. The tank MUST be filling with water while backfilling – equal amounts of water to backfill. Backfill must be a dry mix of sand and cement up to at least 750 mm from the bottom of the tank. The rest MUST be a 32 MPA concrete mix

Contact Aglass for further information or visit our website: www.aglass.com.au

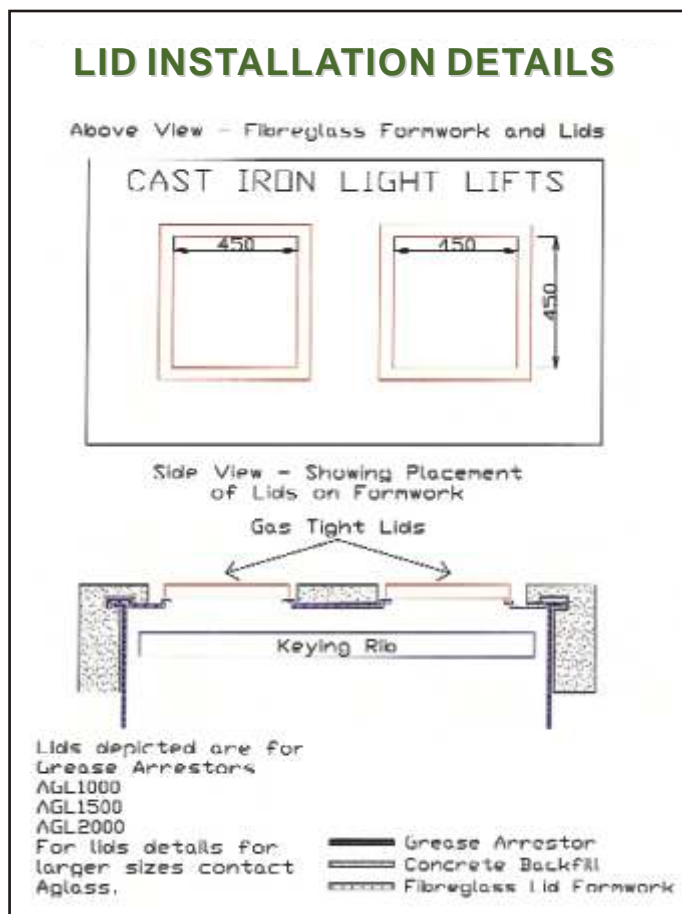

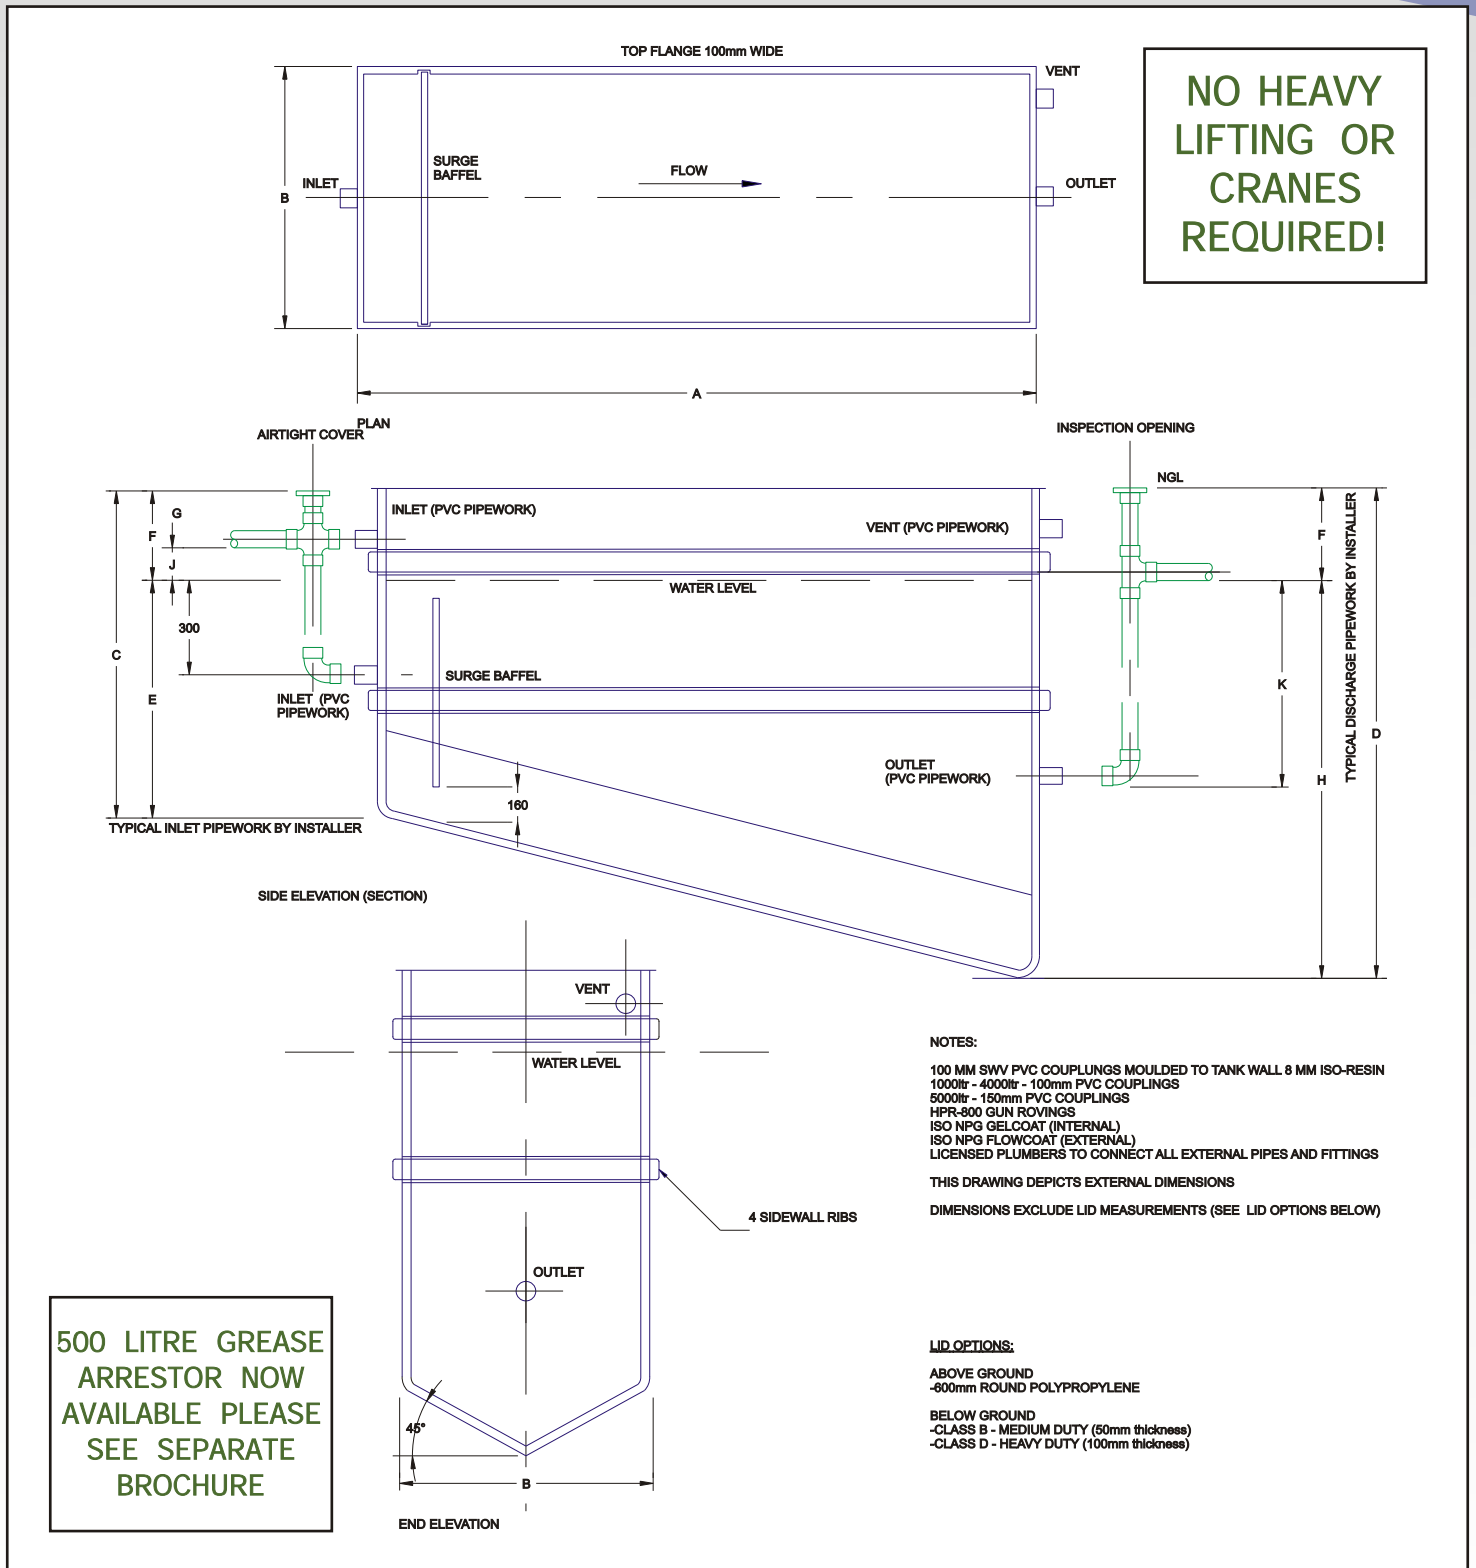

Capacity	Model	Weight Kg	A	B	C	D	E	F	G	H	J	K
1000L	AGL1000	80	1955	840	1215	1780	885	330	280	1450	50	790
1500L	AGL1500	90	2350	930	1320	1765	1030	290	215	1475	75	700
2000L	AGL2000	110	2350	1130	1395	1765	1045	350	320	1415	30	960
3000L	AGL3000	150	2870	1430	1775	2010	1215	560	485	1450	75	900
4000L	AGL4000	200	3200	1400	1795	2230	1195	600	500	1630	190	1035
5000L	AGL5000	300	3800	1500	1895	2330	1225	670	480	1660	190	670