

CAR WASH BAY GP-1000 WITH BASKET ARRESTOR & VT-1300 AUTOMATIC PUMP STATION

EACH UNIT COMES FULLY ASSEMBLED


LID OPTIONS:

CLASS B - MEDIUM DUTY (50MM)
CLASS D - HEAVY DUTY (100MM)

POLYPROPYLENE LIDS FOR ABOVE
GROUND UNITS

SYDNEY WATER
PRODUCT
AUTHORISATION
NUMBER:

2007-276

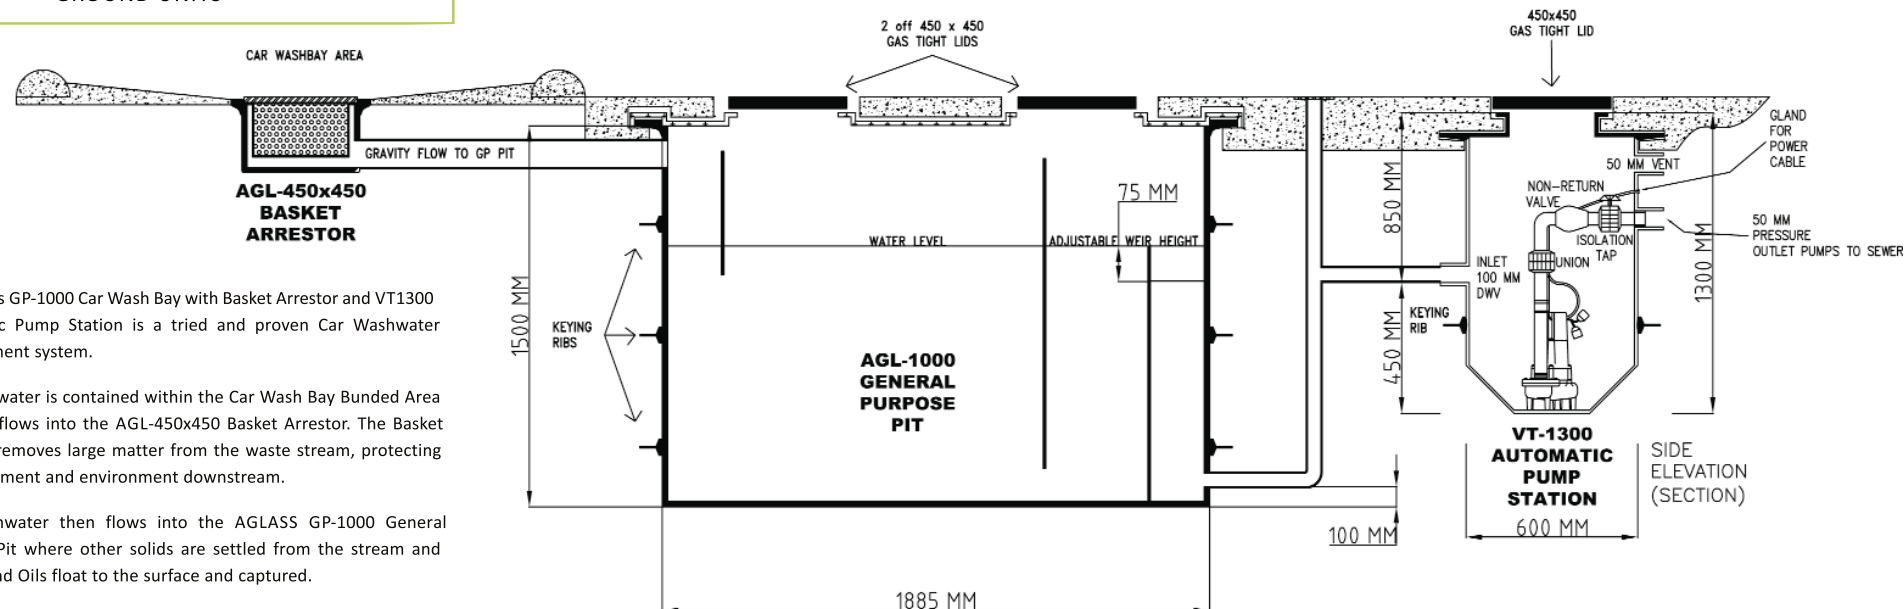

The Aglass GP-1000 Car Wash Bay with Basket Arrestor and VT1300 Automatic Pump Station is a tried and proven Car Washwater pretreatment system.

Car washwater is contained within the Car Wash Bay Bunded Area where it flows into the AGL-450x450 Basket Arrestor. The Basket Arrestor removes large matter from the waste stream, protecting the equipment and environment downstream.

The washwater then flows into the AGLASS GP-1000 General Purpose Pit where other solids are settled from the stream and Grease and Oils float to the surface and captured.

The levels and flow through the system are maintained by the VT1300 Automatic Pump Station. Pretreated washwater is delivered from the VT1300 Automatic Pump Station to sewer.

STANDARD FEATURES:

50MM CHECK VALVE
50MM PRESSURE UNION
50MM ISOLATION TAP

APPLICATIONS:

RESIDENTIAL
COMMERCIAL
INDUSTRIAL

OPTIONAL EXTRAS:

HIGH LEVEL ALARM
RISERS
DUAL PUMPS

TO AUSTRALIAN STANDARDS:

AS1170-P1
AS2634
AS1546

CLASS B - MEDIUM DUTY (50MM)
CLASS D - HEAVY DUTY (100MM)
POLYPROPYLENE LIDS FOR ABOVE
GROUND UNITS

CAR WASHBAY AREA

AGL-450x450 BASKET ARRESTOR

GRAVITY FLOW TO GP PIT

2 off 450 x 450 GAS TIGHT LIDS

1500 MM

KEYING RIBS

WATER LEVEL

ADJUSTABLE WEIR HEIGHT 75 MM

AGL-1000 GENERAL PURPOSE PIT

GRAVITY FLOW TO SEWER

100 MM

1885 MM

Pretreated washwater is delivered from the VT1300 Automatic Pump Station to sewer.

AGLASS GENERAL PURPOSE PIT



AS1170-P1
AS2634
AS1546